


YK900XG

Standard type: Medium type

● Arm length 900mm

● Maximum payload 20kg

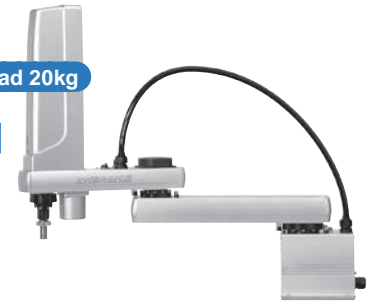

Ordering method

YK900XG			RCX240		R3			BB
Model	Z axis stroke	Cable length	Controller	Usable for CE	Regenerative unit	Expansion I/O <small>Note 1</small>	Network option	Battery
	200: 200mm 400: 400mm	3L: 3.5m (Standard) 5L: 5m 10L: 10m		No entry: Standard E: CE marking	R3: RGU-3	N, P: Standard I/O 16:8 N1, P1: 40/24 N2, P2: 64/40 N3, P3: 88/56 N4, P4: 112/72	No entry: None CC: CC-Link DN: DeviceNet PB: Profibus EN: Ethernet YC: YC-Link	BB: 4 pcs

Note 1. Use N to N4 when NPN is selected on the I/O board, and P to P4 when PNP is selected.
Note 2. Available only for the master.

Specifications

		X-axis	Y-axis	Z-axis		R-axis
Axis specifications	Arm length (mm)	500	400	200	400	—
	Rotation angle (°)	+/-130	+/-150	—		+/-360
AC servo motor output (W)		750	400	400	200	360
Deceleration mechanism	Speed reducer	Harmonic drive	Harmonic drive	Ball screw	Harmonic drive	
	Transmission method	Direct-coupled				
	Motor to speed reducer Speed reducer to output	Direct-coupled				
Repeatability <small>Note 1</small> (XYZ: mm) (R: °)		+/-0.02		+/-0.01		+/-0.004
Maximum speed (XYZ: m/sec) (R: °/sec)		9.9		2.3	1.7	920
Maximum payload (kg)		20				
Standard cycle time: with 2kg payload <small>Note 2</small> (sec)		0.49				
R-axis tolerable moment of inertia <small>Note 3</small> (kgm ²)		1.0				
User wiring (sq × wires)		0.2 × 20				
User tubing (Outer diameter)		φ6 × 3				
Travel limit		1.Soft limit 2.Mechanical stopper (X,Y,Z axis)				
Robot cable length (m)		Standard: 3.5 Option: 5,10				
Weight (kg) (Excluding robot cable)		Z axis200mm: 54 Z axis400mm: 56				

Note 1. This is the value at a constant ambient temperature. (X,Y axes)
Note 2. When reciprocating 300mm in horizontal and 25mm in vertical directions.
Note 3. There are limits to acceleration coefficient settings.
Note. Please consult YAMAHA when connecting other tubes and cables to the self-supporting machine harness.

Controller

Controller	Power capacity (VA)	Operation method
RCX240-R3	2500	Programming / I/O point trace (BCD) / Remote command / Operation using RS-232C communication

YK900XG

